




Multiuser mode

1

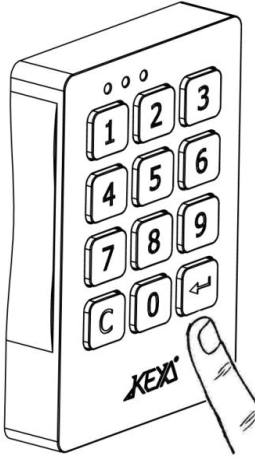

To close:

* * * * ←


To open:

* * * * ←

Open and close by 4-digit code. The code is erased every time the lock is opened, being available for a new use.

Single User mode

2

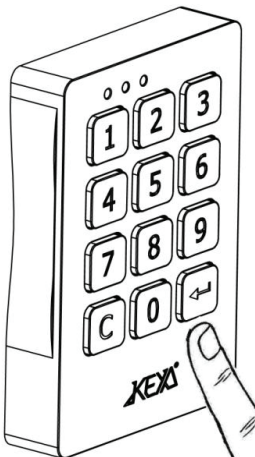

To open:


* * * * ←

To close:

The latch closes automatically after 2 seconds.
Note: the lock is provided with a metal latch holder that allows to close the door just by pushing it. (slam door system)


Open and close by 4-digit code. The code is set for 1 user only.

Change the User code

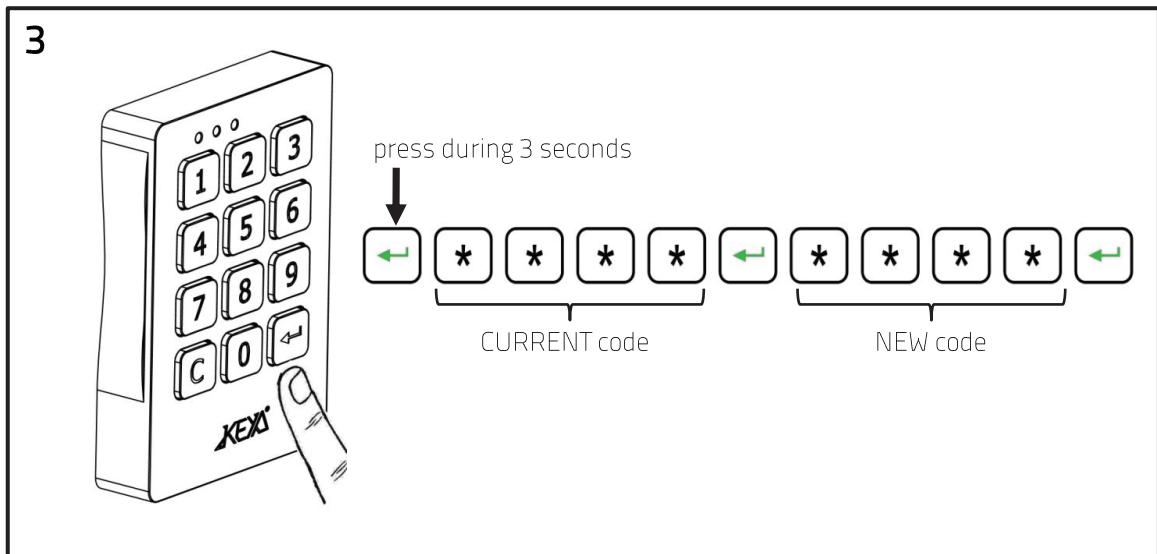

Press Enter during 3 seconds.
Introduce Current code and press Enter.
Introduce New code and press Enter.

Open using Master code: Inspection mode / Delete last User code

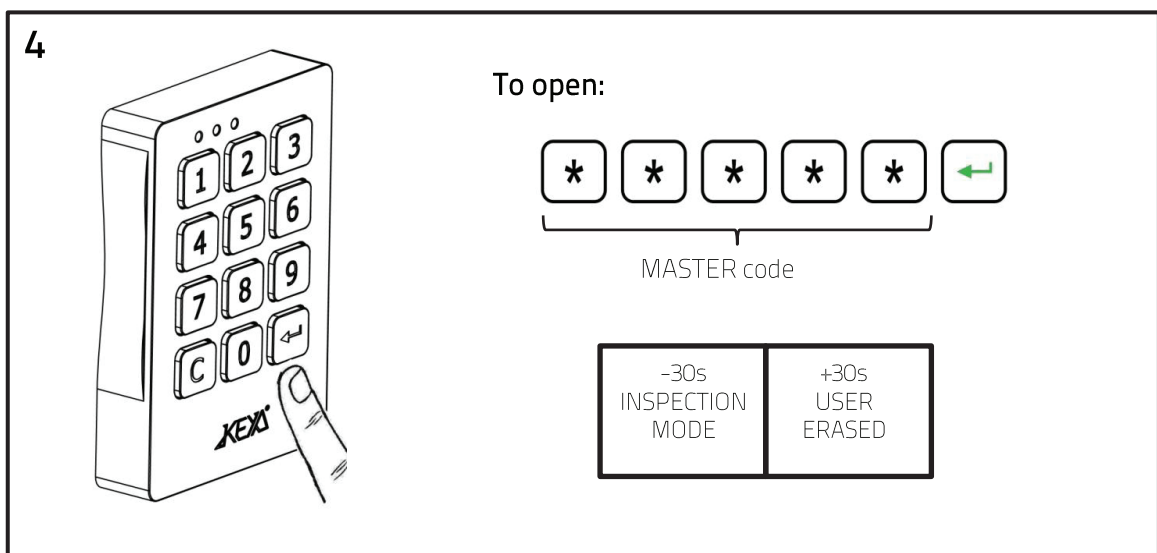


INSPECTION MODE
Introduce the 5 digit Master code and press Enter
Close the lock by pressing Enter before 30s.
The User code is not deleted.

DELETE USER CODE
Introduce Master code and press Enter.
After 30s the lock remains opened.
The user code has been deleted and a new User
code will be required to close the lock again.

Change the Master code

5

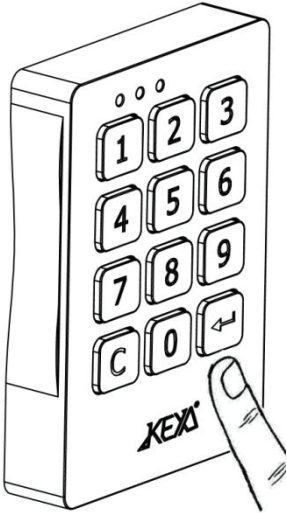

press during 3 seconds

↓

←

*

*

*

*

*

←

CURRENT master code

*

*

*



*

*


←

NEW master code

Press Enter during 3 seconds.
 Introduce Current master code and press Enter.
 Introduce New master code and press Enter.

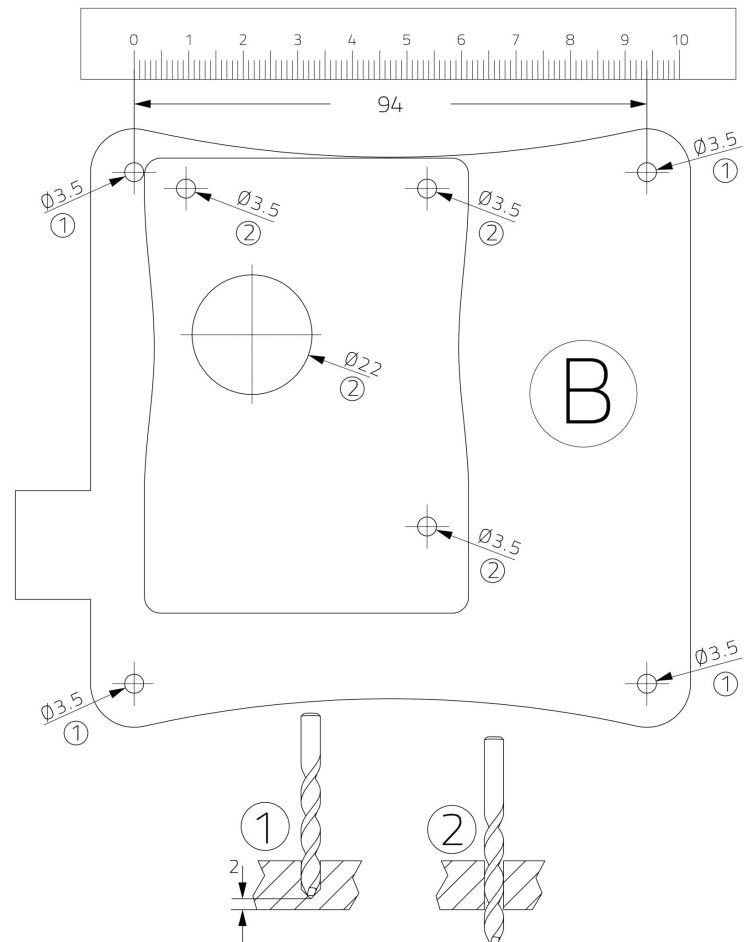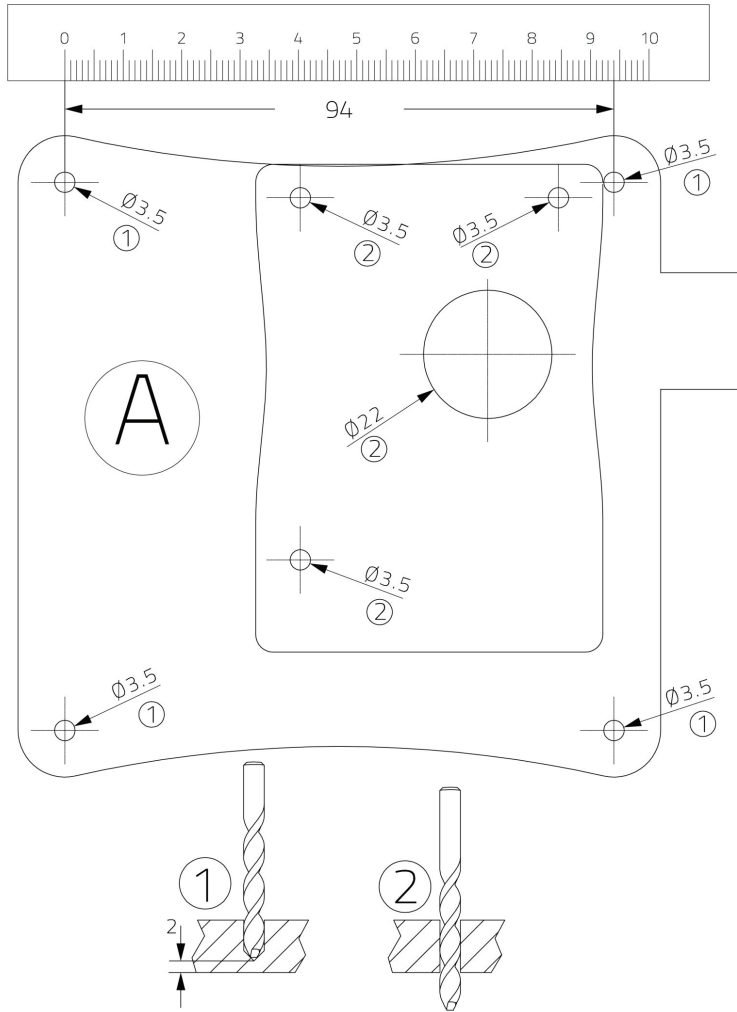


Batteries replacement

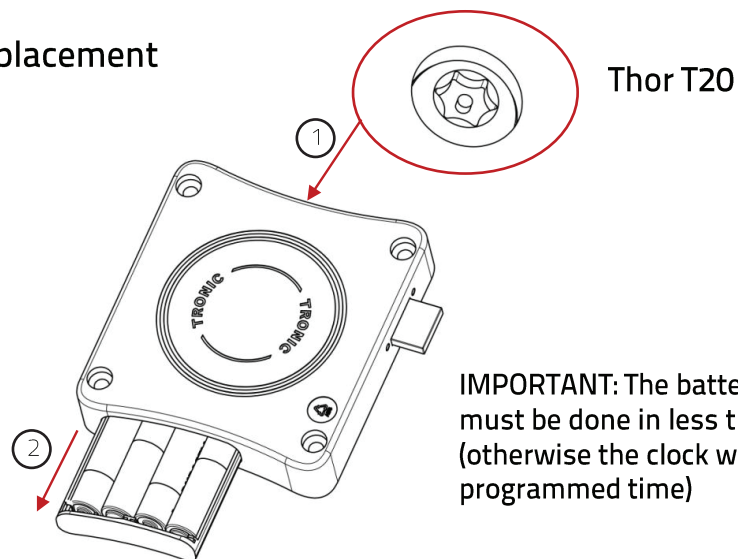

IMPORTANT: The batteries replacement must be done in less than 5 minutes (otherwise the clock will loose the programmed time)

Measurements

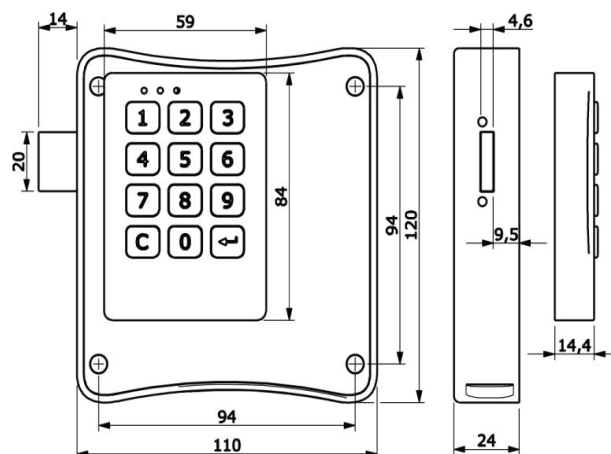

Technical specifications

Salt spray test	> 96h
Working temperature	-5 ° C < > +70 ° C
IP	IP 65
Latch force	> 45Kgf
UV Rays	> 10000h
Vibration	10 - 200 Hz 2g
Life test	> 200000 cycles
Electrostatic discharge	8000 V
Battery life	> 30000 cycles



RoHS



Management System
ISO 9001:2008



Aba-Szer Fémbútor Kft.

Köszönjük hogy termékünket választotta!