





Multiusuer mode

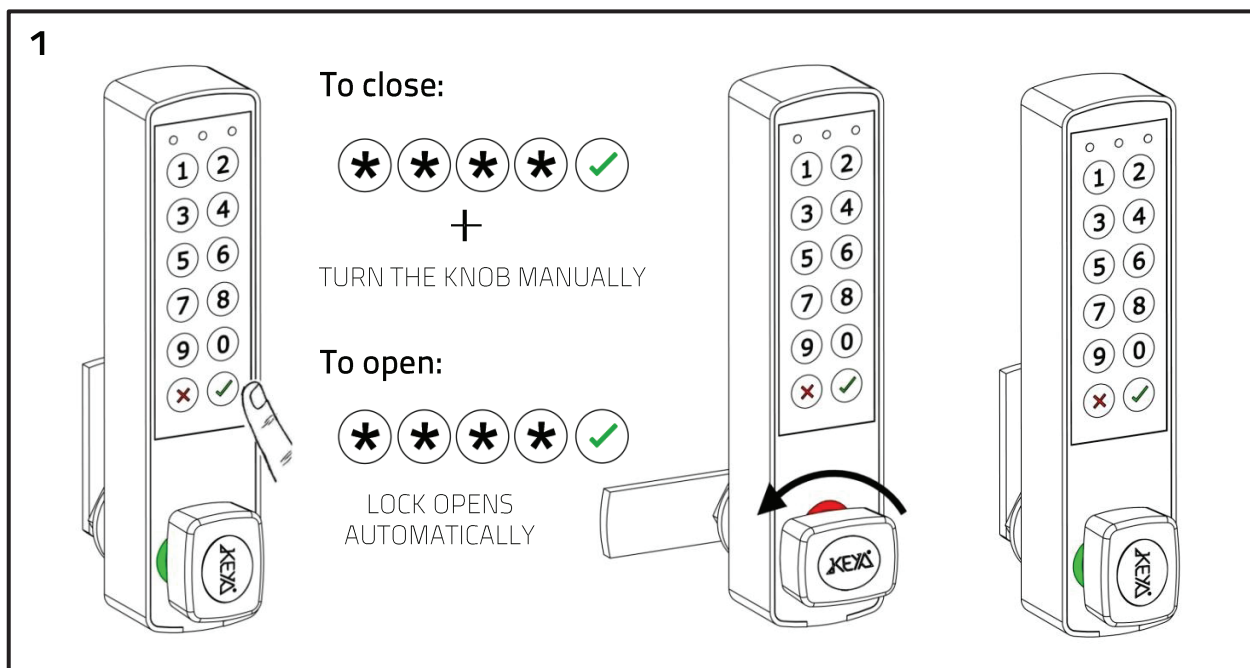


Open and close by 4-digit code. The code is deleted every time the lock is opened, being available for new user.

Single User mode

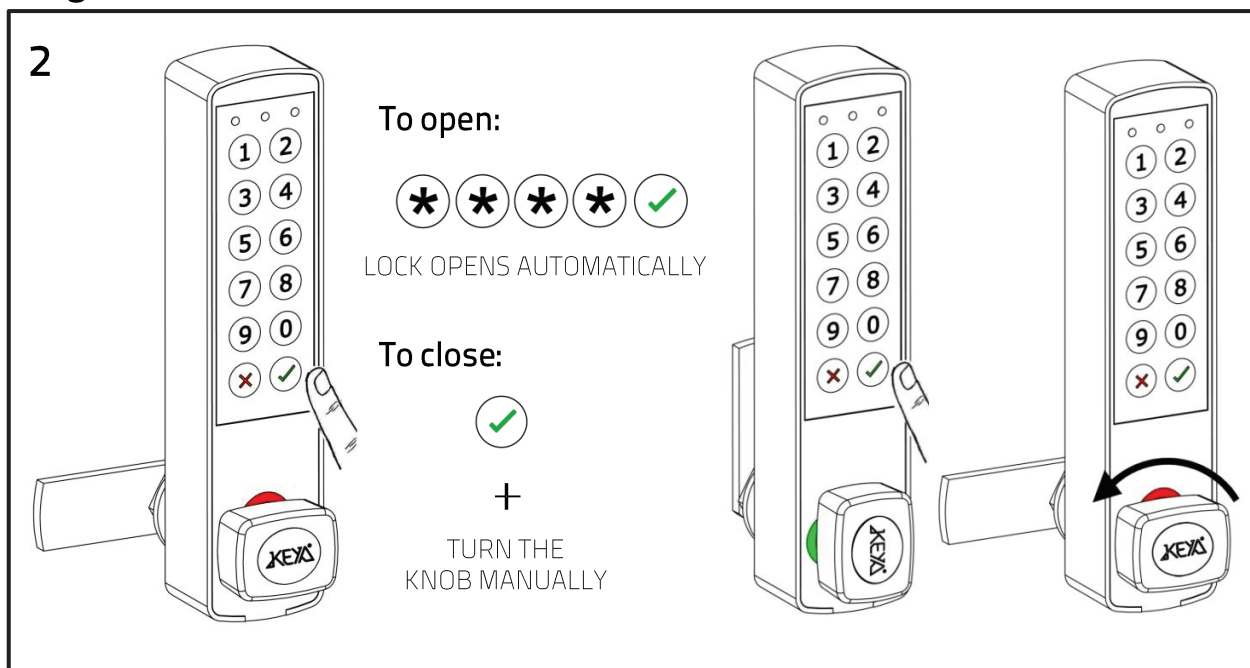


Open and close by 4-digit code. The code is set for 1 user only.

Change the User code

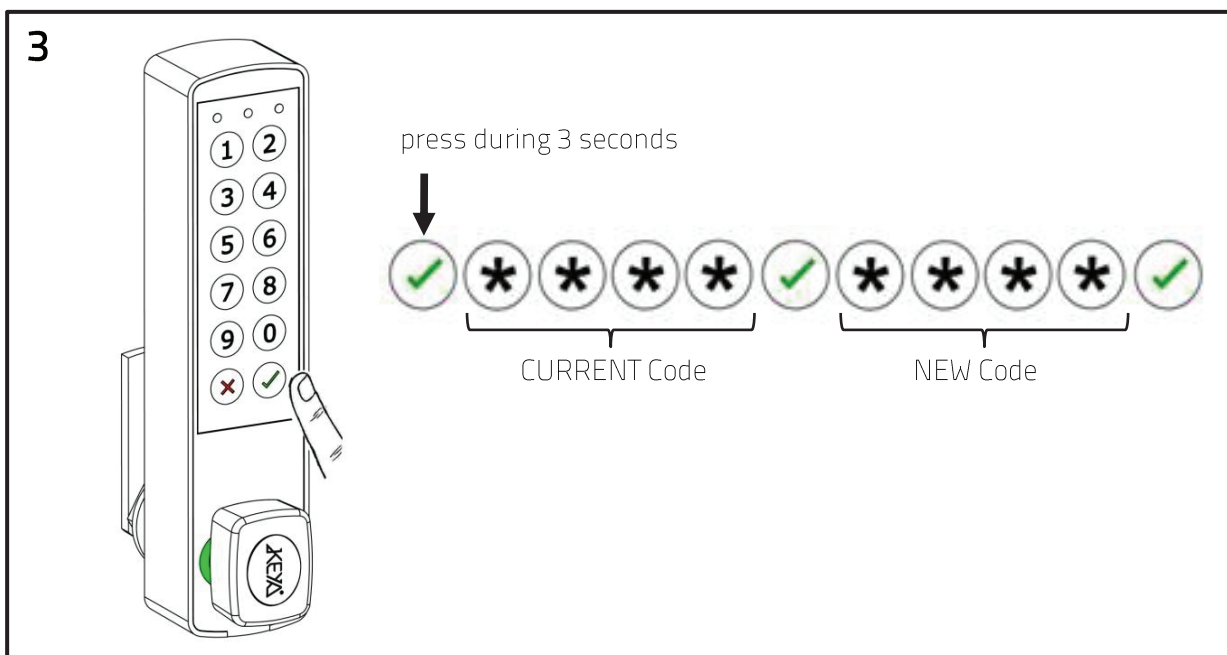

Press Enter key during 3 seconds.
Introduce Current code and press Enter.
Introduce New code and press Enter.

Open using Master code: Inspection mode / Delete User code

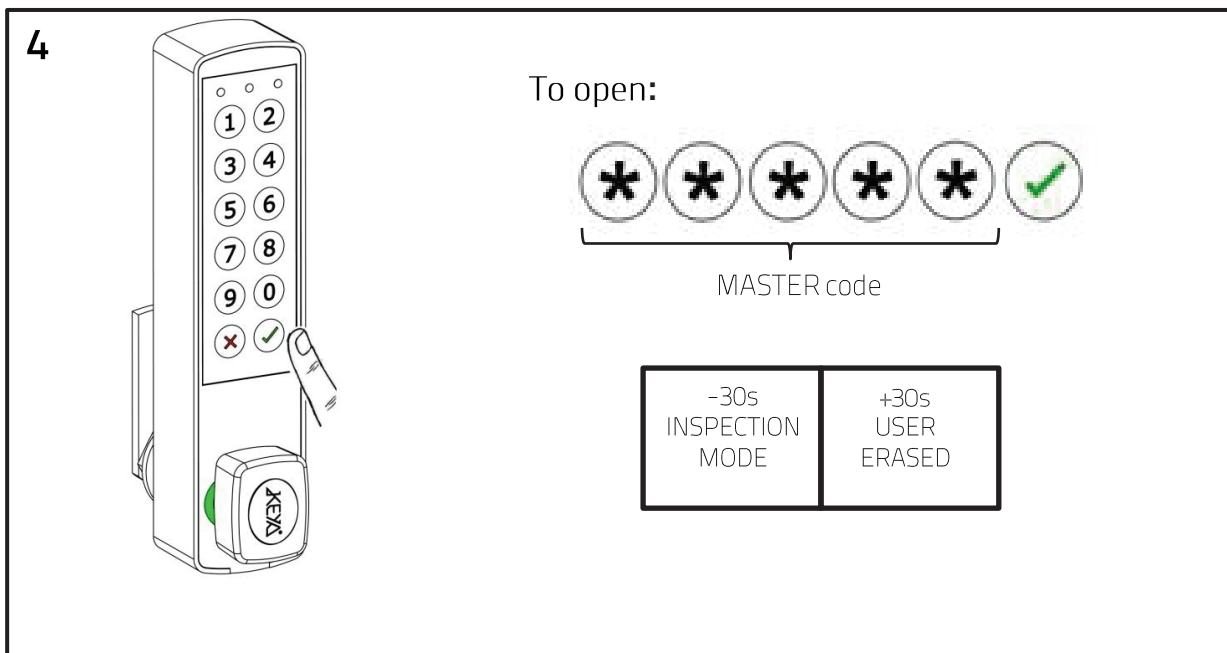

INSPECTION MODE

Introduce Master code and press Enter.
Close the lock by pressing Enter before 30s.
The User code is not deleted.

DELETE USER CODE

Introduce Master code and press Enter.
After 30s. the lock remains opened.
The user code has been deleted and a new User code will be required to close the lock again.

Change the Master code

5



press during 3 seconds




CURRENT master code



NEW master code

Press Enter during 3 seconds.
Introduce Current code and press Enter.
Introduce New code and press Enter.

Measurements

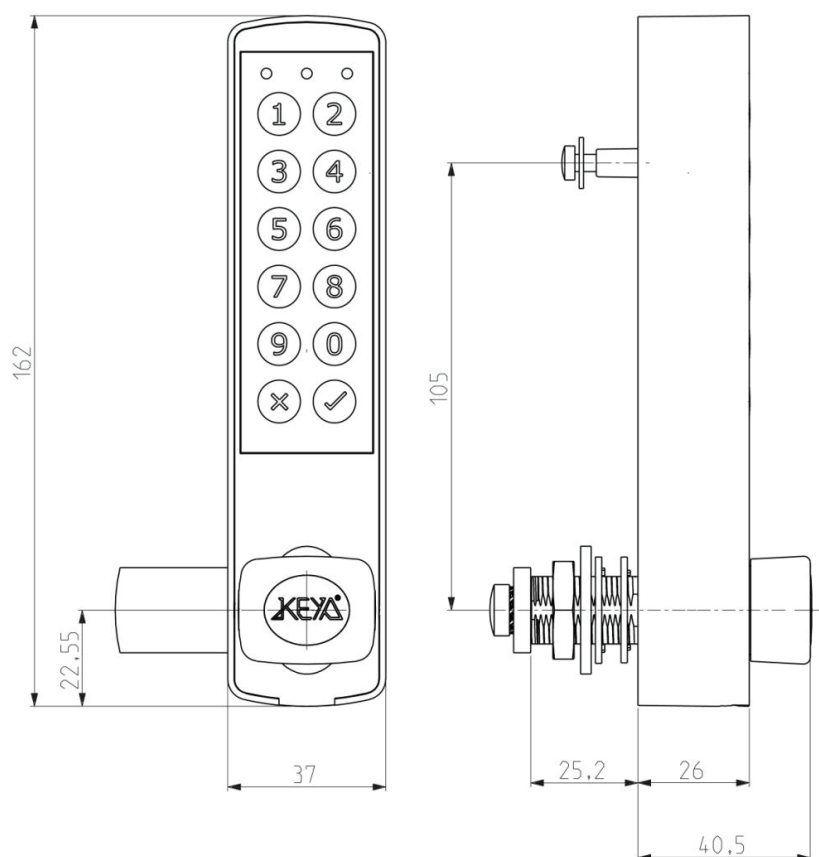

Technical specifications

Salt spray test	> 96h
Working temperature	-5 ° C <> +70 ° C
IP	IP 65
Latch force	> 45Kgf
UV Rays	> 10000h
Vibration	10 - 200 Hz 2g
Life test	> 200000 cycles
Electrostatic discharge	8000 V
Battery life	> 35000 cycles



RoHS



Management
System
ISO 9001:2008

www.tuv.com
ID 9105066651



Aba-Szer Féműtor Kft.

Köszönjük hogy termékünket választotta!